


1½" LETTERING WITH  
.344 STROKE  
(BETWEEN 5/16" & 3/8")

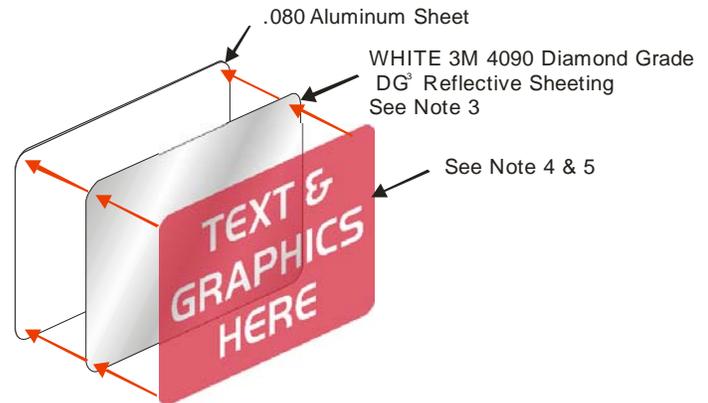

NOTES:

1. THE SIGN FACE SHALL BE 12" X12" AND FABRICATED FROM .080 ALUMINUM SHEET WITH 1½" RADIUS CORNERS.
2. FONT STYLE USED IS HANDEL GOTHIC BT CAPITAL FONTS, ADDITIONAL KERNING BETWEEN LETTERS AS SHOWN.
3. THE SIGN FACE SHALL HAVE A WHITE 3M DIAMOND GRADE REFLECTIVE SHEETING (DG<sup>3</sup> 4090 SERIES OR EQUIVALENT) APPLIED AS A BACKGROUND TO THE ALUMINUM PLATES.
4. LETTERING SHALL BE DONE ONE OF THE FOLLOWING WAYS:
  - A. 3M SCOTCHLITE ACRYLIC, TRANSPARENT, ELECTRONIC CUTTABLE FILM (RED 1172 SERIES) INVERSE CUT TO ALLOW WHITE REFLECTIVE BACKGROUND TO SHOW THROUGH.
  - B. SCREEN PRINTED USING 3M 880I OR 880-00 SERIES TRAFFIC SIGN RED TRANSLUCENT INK.
 BOTH PROCESSES ( A OR B ) WILL ACCOMPLISH A RED FIELD WITH WHITE COPY.
5. ALL SIGN IMAGING SHALL BE IN COMPLIANCE WITH THE REFLECTIVE SHEETING MANUFACTURES MATCH COMPONENT SYSTEM.